

Alternative Studies Abutment Structure and Bridge Oprit on Soft Soil at Belanti Food Estate Area, Pulang Pisau Regency, Central Kalimantan (Case Study : Muara Tahai Bridge Sta. 0+100)

Asrul Mariadi^{a)}, Noor Endah Mochtar^{2,b)} & Riwanto Marbun³⁾

¹⁾*Master Degree Student, Civil Engineering Departement, Institut Teknologi Sepuluh Nopember, Surabaya*

²⁾*Civil Engineering Departement, Institut Teknologi Sepuluh Nopember, Surabaya*

³⁾*Head of Regional 2 National Road Implementation Work Unit for Central Kalimantan Region, Directorate General of Highways in Ministry of Public Works and Housing*

Correspondent: ^{a)}asrul.mariadi@adhi.co.id & ^{b)}noormochtar@gmail.com


ABSTRACT

One of the PSN progarm is the improvement of Muara Tahai Bridge that located in Pulang Pisau Regency. The existing design of the substructures uses steel piles with a diameter of 50 cm and a depth of 28 meters due to soft soil condition. After a few trial, the effective design using piles can be done with the depth 20 meter with Pmax control of 34.65 tons < P allowed for group piles of 41.81 tons. An alternative design as a substructure is using floating foundation, which is concrete foundation using floaton material in it. The floating foundation dimension is 10 meter long, 3.2 meter width and 1,5 meter thick. The bearing capacity of the floating foundation using Terzaghi theory is 5,02 Ton/m².

Keyword : Soft soil, bearing capacity, floating foundation


INTRODUCTION

Indonesian government has been launched a program to support social economy for it's people using PSN (Proyek Strategis Nasional) that carried out in the infrastructure sector. One of the program that has been run is Food Estate Area in Pulang Pisau Regency and Kapuas Regency, Center Kalimantan. This project goals is to improve the quality of road and the connectivity between national road and the improvement area of Food Estate. This program is run and become task for PUPR Ministry through Direktorat Jenderal Bina Marga. One improvement project that will be discussed in detail is the Muara Tahai Bridge which is located at Sta. 0+100 on Janas – STI Simpang Tiga (Sp.3) Section with a span of 50 m.

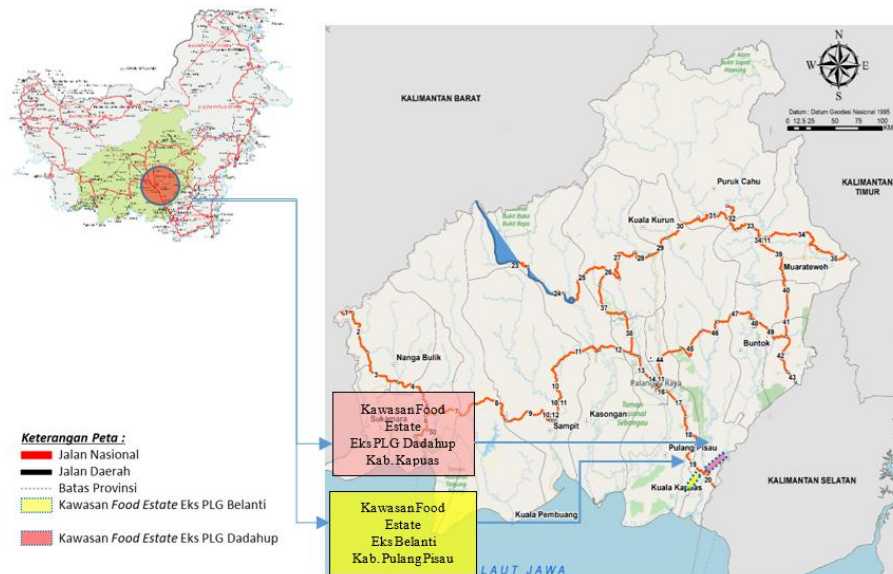


(Source: KPIJ Balai Pelaksanaan Jalan Nasional, Center Kalimantan)

Figure 1. Location of Food Estate Area Ex-PLG Belanti, Kabupaten Pulang Pisau and Food Estate Area Ex-PLG Dadahup, Kabupaten Kapuas, Center Kalimantan

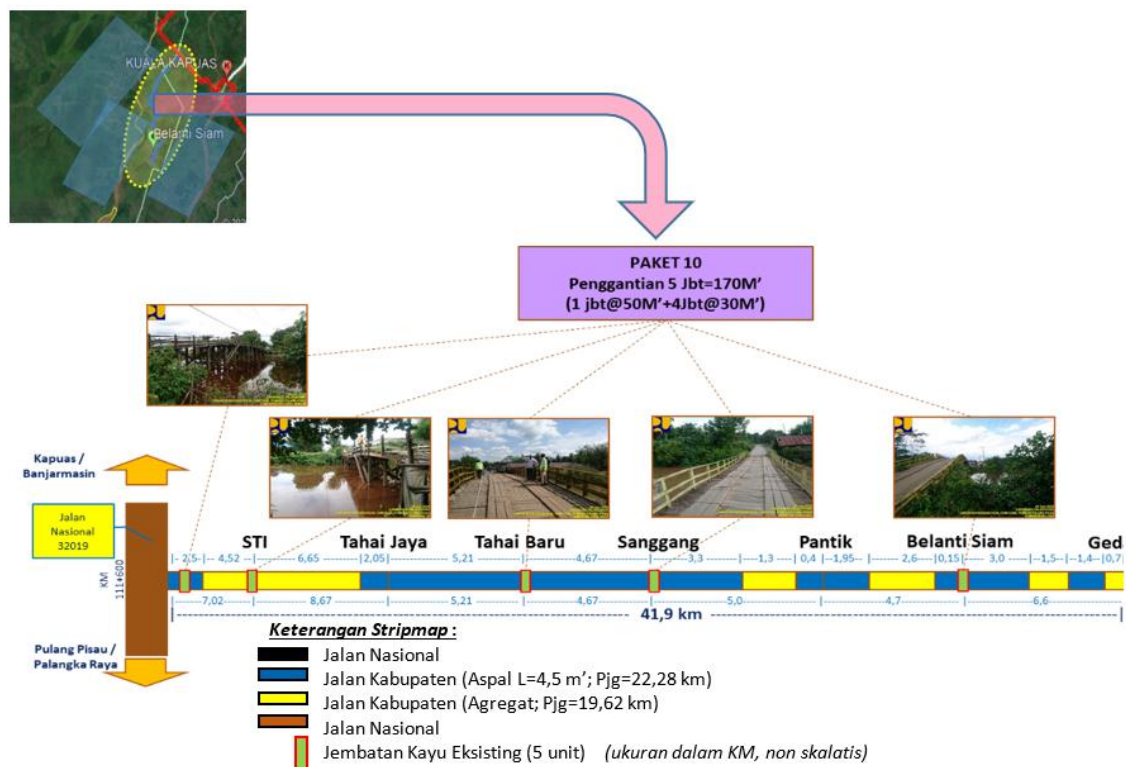

(Source: KPIJ Balai Pelaksanaan Jalan Nasional, Center Kalimantan)

Figure 2. Location of Bridge Improvement Food Estate Area Ex-PLG Belanti, Kabupaten Pulang Pisau, Center Kalimantan

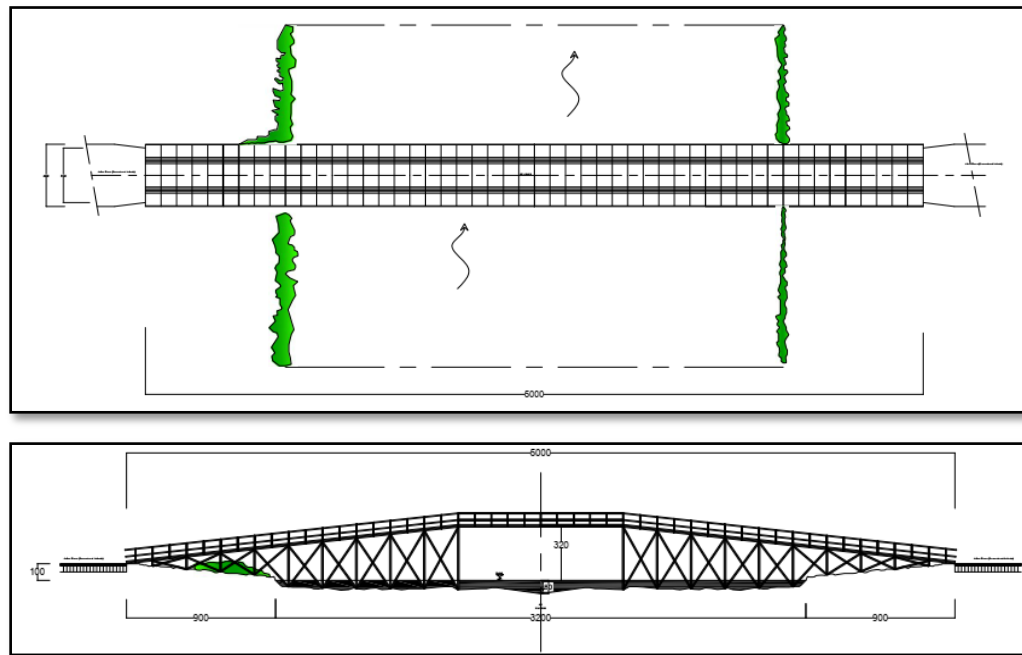

(Source: KPIJ Balai Pelaksanaan Jalan Nasional, Center Kalimantan)

Figure 3. Top View and Longitudinal View Muara Tahai Bridge, Sta. 0+100

The main focus of this project is the condition of the existing soil, which is very soft soil. This challenge is quite risky, where the land is the main basis for the establishment of a building. So the strengthening of the structure under the bridge structure is needed. In general condition, the soil bearing capacity at the Muara Tahai Bridge project is soft soil with a gray silty clay soil type with soft soil condition until 20 meters depth.

Therefore, based on these conditions, Muara Tahai Bridge require an improvement to increase road facilities by noticing the capacity of bottom structure. This journal will focus more on discussing the comparison between the carrying capacity of existing and alternative pile foundation and alternative design using floating foundations.

LITERATURE REVIEW

Soft Soil

Based on Geotechnical Guide 1 Formation Process and Basic Properties of Soft Soils (2002), the USCS System divides soils into three main groups namely coarse-grained soils, fine-grained soils and soils with a high organic content.

Table 1. Classification of Fine Grained Soil Based on Organic Content

Organic Content	Soil Classification
> 75%	Peat
25% - 75%	Organic Soil
< 25%	Soil with Low Organic Content

(Source: Geotechnical Guide 1 Formation Process and Basic Properties of Soft Soil, 2002, p. 46)

Soft soil contains clay minerals and contains a high water content. Generally, a layer of soil called a soft layer is clay or silt which has a standard penetration test value (N) of less than 4 or organic soils such as peat which have a very high natural moisture content. The term "soft soil" refers to soils in which if not carefully identified and investigated, may cause long term instability and intolerable problems due to their low shear strength and high compressibility according to Geotechnical Guide 1 Formation Processes and Basic Properties

of Soft Soils (2002).

Pile Foundation

Piles are widely used in Indonesia as building foundations which have relatively heavy loads. The basic consideration of using pile foundation are the presence of a large load so that shallow foundations cannot be used, and the type of soil at the construction site is relatively soft, so that direct foundation are not economical to use. For these conditions, the use of pile foundations has several advantages, there are:

1. Production costs that are more expensive become cheaper when converted to the power produced..
2. Easier to use.
3. The equipment used is easily available..
4. Workers in Indonesia are skilled enough to carry out buildings using pile foundations.
5. Relatively faster execution time.

Generally pile foundations are used when the base soil does not have sufficient bearing capacity to carry the weight of the building and the load on it, and also when the location of hard soil that has sufficient bearing capacity to carry the weight of the building above is located in a very deep position.

Floating Foundation

The bearing capacity of the subgrade foundation is based on the Terzaghi formula for square foundation foundations on soil:

$$qu = 1,3 c N_c + q N_q + 0,4 \gamma t B N_\gamma \quad \dots(1)$$

For N_c , N_q and N_γ is a bearing capacity factor whose value depends on the value of the angle of shear in the soil (ϕ) can be seen in Table 2.

Table 2. Table of Bearing Capacity Factors based on Terzhaghi

ϕ	General Shear Collapse		
	N_c	N_q	N_γ
0	5,7	1	0
5	7,3	1,6	0,5
10	9,6	2,7	1,2
15	12,9	4,4	2,5
20	17,7	7,4	5
25	25,1	12,7	9,7
30	37,2	22,5	19,7
34	52,6	36,5	35
35	57,8	41,4	42,4
40	95,7	81,3	100,4
45	172,3	173,3	297,5
48	258,3	287,9	780,1
50	347,6	415,1	1153,2

Source: Herman,1999

Information :

c = Soil Cohession
 q = $\gamma t \times D_f$
 B = Width Foundation

DATA COLLECTION

Soil Data in Study Location


Soil data that will be used as the basis for planning in this discussion uses SPT data in Borelog BH-02 contractor and BH-01 consultant.

Kedalaman (m)			(BH-02) B		Parameter Tanah dasar												
			Nilai SPT, N	Jenis Tanah Borelog	Data Borelog Pelaksanaan (BH-02)	Wc (%)	Vsat (kN/m ³)	Gs	e dengan rumus γ	Sr	LL	PL	IP	Cc	Cs	Cv (cm ³ /det)	
Rekapitulasi Data																	
0	-	1	0	Lempung	Sangat Lunak (very soft)	85	13.000	2.300	2.273	100	59.30			0.90	0.1282	0.0011	
1	-	2	0		Sangat Lunak (very soft)	85	13.000	2.300	2.273	100	59.30						
2	-	3	0		Sangat Lunak (very soft)	85	13.000	2.300	2.273	100	59.30						
3	-	4	0		Sangat Lunak (very soft)	85	13.000	2.300	2.273	100	59.30						
4	-	5	0		Sangat Lunak (very soft)	85	13.000	2.300	2.273	100	59.30						
5	-	6	0		Sangat Lunak (very soft)	85	13.000	2.300	2.273	100	59.30						
6	-	7	0	Lempung berlanau abu - abu	Sangat Lunak (very soft)	85	13.000	2.300	2.273	100	56.00			0.88	0.1254	0.0012	
7	-	8	0		Sangat Lunak (very soft)	85	16.04	2.56	1.955	100	50	33.97	57.72	0.67	0.0953	0.0016	
8	-	9	0		Sangat Lunak (very soft)	85	16.04	2.56	1.955	100	50	33.97	57.72	0.67	0.0953	0.0016	
9	-	10	6		Lempung berlanau abu - abu	Sedang (medium stiff)	57	16.04	2.56	1.508	100	49.00	33.97	57.72	0.46	0.0657	0.002
10	-	11	6		Sedang (medium stiff)	57	16.04	2.56	1.508	100	49	33.97	57.72	0.46	0.0657	0.002	
11	-	12	5		Sedang (medium stiff) Lunak (soft)	57	16.04	2.56	1.508	100	49	33.97	57.72	0.46	0.0657	0.002	
12	-	13	5	Lempung merah	Sedang (medium stiff) Lunak (soft)	57	16.04	2.56	1.508	100	49	33.97	57.72	0.46	0.0657	0.002	
13	-	14	4		Lempung abu - abu	Lunak (soft)	65	16.04	2.56	1.636	100	48	33.97	57.72	0.51	0.0723	0.0021
14	-	15	5	Lempung merah	Sedang (medium stiff) Lunak (soft)	55	16.04	2.56	1.476	100	48	33.97	57.72	0.44	0.0612	0.0021	
15	-	16	6		Sedang (medium stiff)	60	16.00	2.65	1.650	100	46.50			0.48	0.0688	0.0022	
16	-	17	3	Lempung abu - abu keputihan	Sangat Lunak (very soft)	60	16.00	2.65	1.650	100	46.50			0.48	0.0688	0.0022	
17	-	18	7	PASIR HALUS CAMPUR KASAR	Sangat Lepas (Very Loose)	55	16.6	2.6	1.428	100.000	46					0.0023	
18	-	19	7	M.L.-OL Lempung Coklat	Sedang (medium stiff)	55	16.6	2.65	1.474	100.000	46			0.43	0.0612	0.0023	
19	-	20	7		Sedang (medium stiff)	55	16.6	2.65	1.474	100.000	46			0.43	0.0612	0.0023	
20	-	21	10		Sedang (medium stiff)	55	16.6	2.65	1.474	100.000	46			0.43	0.0612	0.0023	
21	-	22	16		kaku (stiff)	40.78	17.1	2.43	1.001	100.000	45.4901	29.532	15.9585	0.27	0.0390	0.0024	
22	-	23	20		kaku (stiff)												
23	-	24	38		Padat (dense)												
24	-	25	40	PASIR HALUS PUTIH	Padat (dense)												
25	-	26	57		Padat (dense)	24.65	1.84	2.52									
26	-	27	40		Padat (dense)												
27	-	28	43		Padat (dense)												
28	-	29	50		Padat (dense)												
29	-	30	58		Padat (dense)												

Source: Central Kalimantan BPJN Calculation and Data Analysis

Figure 4. Stratigraphy of the results from contractor's Soil Investigation

Ked (m)	Data Borelog Perencana (BH-01)		Data Borelog Perencana (BH-02)	
	NSPT	Jenis Tanah (Bahan Ajar MPT)	Jenis Tanah (Bahan Ajar MPT)	NSPT
0 - 1	0		Lempung kelanauan	0
1 - 2	1		Lempung kelanauan	1
2 - 3	1			1
3 - 4	1			1
4 - 5	1			1
5 - 6	1			1
6 - 7	1		Pasir kelanauan	1
7 - 8	2	Lempung kelanauan		2
8 - 9	2			2
9 - 10	2			2
10 - 11	2			2
11 - 12	9			9
12 - 13	9			9
13 - 14	9			9
14 - 15	9		Lempung kelanauan	9
15 - 16	8			8
16 - 17	8			8
17 - 18	10			10
18 - 19	10	Pasir kelanauan		10
19 - 20	8			8
20 - 21	8			8
21 - 22	12		Lempung (Medium)	12

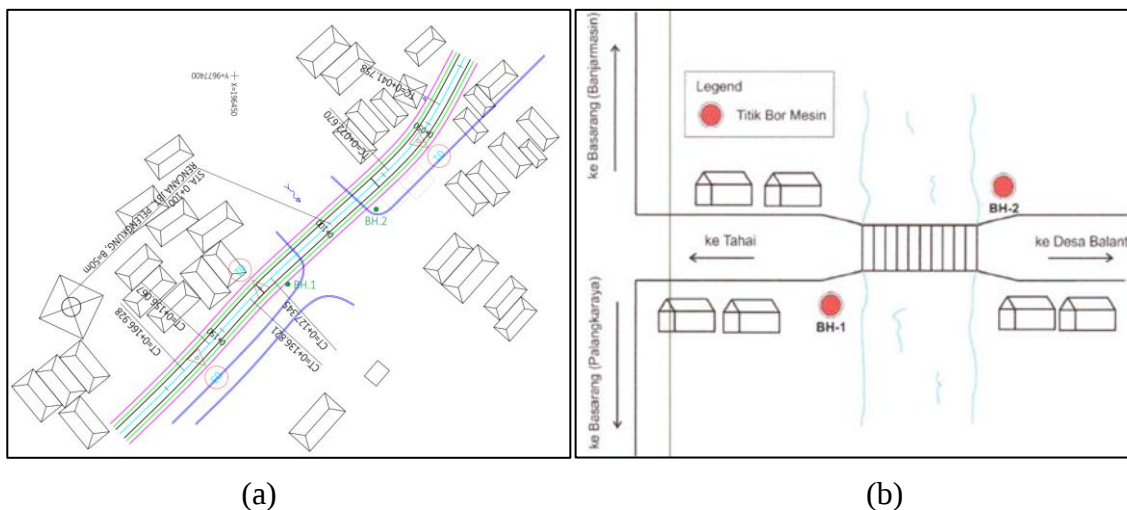
Figure 5. Stratigraphy of soil investigation results**Figure 6.** Location of soil investigation, (a) Consultant's soil boring layout; (b) Consultant's soil boring layout**Table 3.** Laboratory Test Results for Consultant Soil Data

Name	Depth (m)	Water content	Unit Weight	Dry Density	Specific Gravity	Void Ratio e
		Wn (%)	γ (gr/cm ³)	γ_d (gr/cm ³)	Gs (gr/cm ³)	
BH-01	7.0-7.5	56.43	1.604	1.025	2.562	1.499
BH-02	11.0-11.5	51.81	1.631	1.074	2.579	1.4

Table 4. Laboratory Test Results for Contractor Soil Data

Name	Depth (m)	Water content	Unit Weight	Specific Gravity
		Wn (%)	γ (gr/cm ³)	Gs (gr/cm ³)
BH-01	9.50-10.00	87.8	1.38	2.43
	19.50-20.00	46.19	1.16	2.06
BH-02	21.50-22.00	40.78	1.71	2.43
	25.50-26.00	24.65	1.84	2.52

Structure Design

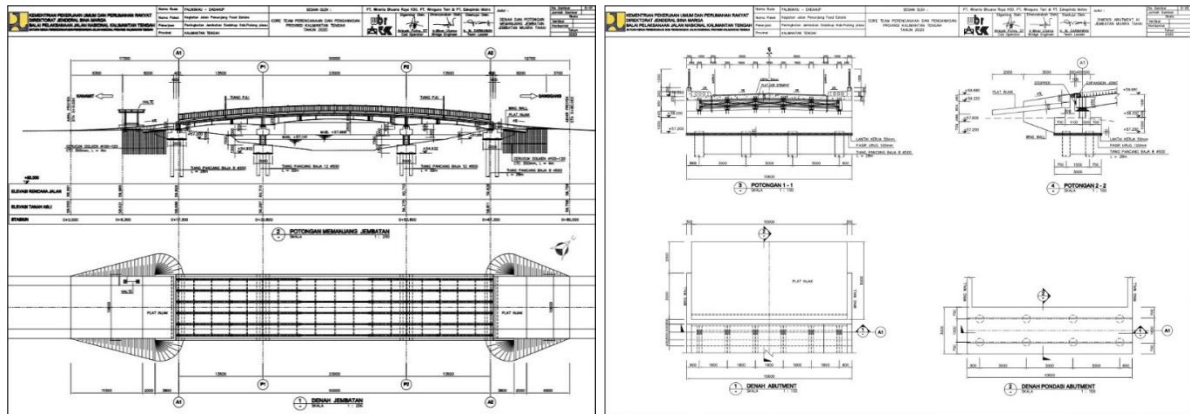

(a)

(b)

(Source: BPJN Kalteng)

Figure 7. (a) Plans and longitudinal sections of the Muara Tahai bridge; (b) Muara Tahai bridge abutment dimensions

RESEARCH ANALYSIS

PILE FOUNDATION DESIGN

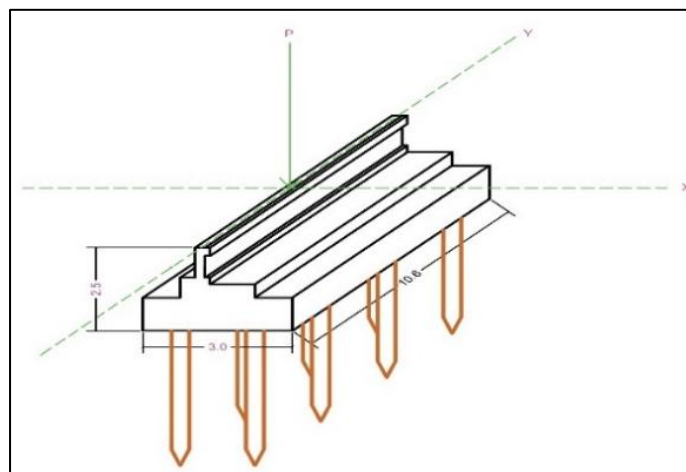


Figure 8. Illustration of the existing pile group perspective design

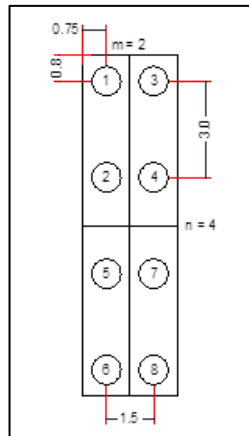


Figure 9. Top View existing design of Pile Group Design

Bearing Capacity of Existing Pile Design

Analysis of the bearing capacity of the piles on the abutment foundation of the bridge pile foundation using 8 point steel piles with a diameter of 500 mm x 28 meters using a combination of 1 abutment loading.

Pile Cap Lenght	= 10,60 m
Pile Cap Width (B)	= 3,00 m
Tux	= 30,22 Ton
Tuy	= 0,00 Ton
Mx	= 45,33 Ton.m
My	= 0,00 Ton.m

Table 5. Recap of the Load Distribution of Existing Pile Design

No	X	Y	X ²	Y ²	
1	-0,75	4,50	0,56	20,25	
2	-0,75	1,50	0,56	2,25	
3	0,75	4,50	0,56	20,25	
4	0,75	1,50	0,56	2,25	Max
5	-0,75	-1,50	0,56	2,25	
6	-0,75	-4,50	0,56	20,25	Min
7	0,75	1,50	0,56	2,25	
8	0,75	4,50	0,56	20,25	
Total			4,50	90,00	

Source: Calculation Analysis

$$P_{\max} = \frac{\Sigma V}{n} \pm \left(\frac{M_y}{\Sigma x^2} \right) + \left(\frac{M_x}{\Sigma y^2} \right) \quad \dots(1)$$

$$P_{\max} = \frac{2910,3 \times 0,102}{8} + \left(\frac{0}{0,56+0,56} \right) + \left(\frac{45,33}{20,25+2,25} \right)$$

$$= 39,12 \text{ ton}$$

$$P_{\min} = \frac{\Sigma V}{n} \pm \left(\frac{M_y}{\Sigma x^2} \right) + \left(\frac{M_x}{\Sigma y^2} \right) \quad \dots(2)$$

$$P_{\min} = \frac{2910,3 \times 0,102}{8} - \left(\frac{0}{0,56+0,56} \right) - \left(\frac{45,33}{2,25+20,25} \right)$$

$$= 35,09 \text{ ton}$$

Foundation Data

Type	= Steel Pipe
Pile Diameter, d	= 0.5 m
Pile Length, L	= 28 m (According to plan)
Distance Between Piles, s	= 3 m
Start	= 1.2 m (MAT)
End	= 29.2 m
Point Drill Overview	= Drill BH-1 N-SPT
Circumference	= 1.57 m
Pipe Thickness	= 0.00516 m
Area	= 0.2 m ²
SF	= 3
Steel Density	= 7.85 ton/m ³
Melting Stress (F _y)	= 23536.8 Ton/m ²
Steel Allowance Stress	= 11768.4 Ton/m ²

Converse Labarre Efficiency:

$$\begin{aligned}
 E_g &= 1 - \left(\arctan \frac{d}{s} \right) \times \frac{(n-1)m + (m-1)n}{90mn} \quad \dots(3) \\
 &= 1 - (9,46) \times \frac{(4-1) \times 2 + (2-1) \times 4}{90 \times 2 \times 4} \\
 &= 0,87
 \end{aligned}$$

The steel pile strength is calculated as follows:

$$\begin{aligned}
 P_{ijin} &= \text{Steel Allowance Stress} \times (\text{Area Pipe Thickness}) \\
 &= 47,7 \text{ Ton}
 \end{aligned}$$

$$\begin{array}{lll}
 P_{max} & \leq & P_{Allow} \times E_g \\
 39,12 & \leq & 47,7 \times 0,87 \\
 39,12 & \leq & 41,23 \quad \quad \quad \mathbf{OK}
 \end{array}$$

End Bearing Existing Design

$$Q_p = A_p \times q_p \quad \dots(4)$$

Where:

Q_p = End Bearing (ton)

A_p = Area Section (m²)

q_p = Unit End Bearing (t/m²)

Because the soil at the tip of the NSPT is sandy soil:

$$\begin{aligned}
 q_p &= 40 \times NSPT_{av} \quad \dots(5) \\
 &= 40 \times 24,31 \\
 &= 972,32 \text{ t/m}^2
 \end{aligned}$$

$$\begin{aligned}
 Q_p &= A_p \times q_p \quad \dots(6) \\
 &= (1/4 \times 22/7 \times 0,5^2) \times 972,32 \\
 &= 190,99 \text{ ton}
 \end{aligned}$$

$$P_{\text{Single Allowance}} = Q_p / SF$$

$$\begin{aligned}
 &= 190,99/3 \\
 &= 63,66 \text{ ton} \\
 P_{\text{Group Allowance}} &= P_{\text{Single Allowance}} \times E_g \\
 &= 63,66 \times 0,87 \\
 &= 55,3 \text{ ton}
 \end{aligned}$$

End Bearing Control:

$$\begin{aligned}
 P_{\text{max}} &\leq P_{\text{Group Allowance}} \\
 39,12 &\leq 55,3 \quad \text{OK}
 \end{aligned}$$

Bearing Capacity of Alternative Pile Design

Analysis of the bearing capacity of the piles on the abutment foundation of the bridge pile foundation using 8 point steel piles with a diameter of 500 mm x 20 meters using a combination of 1 abutment loading.

$$\begin{aligned}
 \text{Pile Cap Length} &= 10,60 \text{ m} \\
 \text{Pile Cap Width (B)} &= 3,00 \text{ m} \\
 T_{ux} &= 24,55 \text{ Ton} \\
 T_{uy} &= 0,00 \text{ Ton} \\
 M_x &= 36,82 \text{ Ton.m} \\
 M_y &= 0,00 \text{ Ton.m}
 \end{aligned}$$

Table 6. Recap of the Load Distribution of Alternative Pile Design

No	X	Y	X ²	Y ²	
1	-0,75	4,50	0,56	20,25	
2	-0,75	1,50	0,56	2,25	
3	0,75	4,50	0,56	20,25	
4	0,75	1,50	0,56	2,25	Max
5	-0,75	-1,50	0,56	2,25	
6	-0,75	-4,50	0,56	20,25	Min
7	0,75	1,50	0,56	2,25	
8	0,75	4,50	0,56	20,25	
Total			4,50	90,00	

Source : Calculation Analysis

$$\begin{aligned}
 P_{\text{max}} &= \frac{\Sigma V}{n} \pm \left(\frac{M_y}{\Sigma X^2} \right) + \left(\frac{M_x}{\Sigma Y^2} \right) \quad \dots(7) \\
 P_{\text{max}} &= \frac{2589,01 \times 0,102}{8} + \left(\frac{0}{0,56+0,56} \right) + \left(\frac{36,82}{20,25+2,25} \right) \\
 &= 34,65 \text{ ton}
 \end{aligned}$$

$$\begin{aligned}
 P_{\text{min}} &= \frac{\Sigma V}{n} \pm \left(\frac{M_y}{\Sigma X^2} \right) + \left(\frac{M_x}{\Sigma Y^2} \right) \quad \dots(8) \\
 P_{\text{min}} &= \frac{2589,01 \times 0,102}{8} - \left(\frac{0}{0,56+0,56} \right) - \left(\frac{36,82}{2,25+20,25} \right) \\
 &= 31,37 \text{ ton}
 \end{aligned}$$

Foundation Data

$$\begin{aligned}
 \text{Type} &= \text{Steel Pipe} \\
 \text{Pile Diameter, d} &= 0,45 \text{ m}
 \end{aligned}$$

Pile Length, L	= 20 m
Distance Between Piles, s	= 3 m
Start	= 1,2 m (Sesuai MAT)
End	= 21,2 m
Point Drill Overview	= Bor BH-1 N-SPT
Circumference	= 1,41 m
Pipe Thickness	= 0,00516 m
Are	= 0,16 m ²
SF	= 3
Steel Density	= 7,85 ton/m ³
Melting Stress (Fy)	= 23536,8 Ton/m ²
Steel Allowance Stress	= 11768,4 Ton/ m ²

Converse Labarre Efficiency:

$$\begin{aligned}
 E_g &= 1 - \theta \times \frac{(n-1)m + (m-1)n}{90mn} \quad \dots(9) \\
 &= 1 - \left(\text{arc tg } \frac{d}{s} \right) \times \frac{(n-1)m + (m-1)n}{90mn} \\
 &= 1 - (8,53) \times \frac{(4-1) \times 2 + (2-1) \times 4}{90 \times 2 \times 4} \\
 &= 0,88
 \end{aligned}$$

The steel pile strength is calculated as follows:

$$\begin{aligned}
 P_{ijin} &= \text{Steel Allowance Stress} \times (\text{Area Pipe Thickness}) \\
 &= 11768,4 \times 0,0036279 \\
 &= 42,7 \text{ Ton}
 \end{aligned}$$

$$\begin{array}{rcl}
 P_{max} & \leq & P_{Allow} \times E_g \\
 34,65 & \leq & 42,7 \times 0,88 \\
 34,65 & \leq & 37,64 \quad \mathbf{OK}
 \end{array}$$

End Bearing Existing Design

$$Q_p = A_p \times q_p$$

Where:

Q_p = End Bearing (ton)

A_p = Area Section (m²)

q_p = Unit End Bearing (t/m²)

Because the soil at the tip of the NSPT is sandy soil:

$$\begin{aligned}
 q_p &= 40 \times \text{NSPT}_{av} \quad \dots(10) \\
 &= 40 \times 22,36 \\
 &= 894,25 \text{ t/m}^2
 \end{aligned}$$

$$\begin{aligned}
 Q_p &= A_p \times q_p \quad \dots(11) \\
 &= (1/4 \times 22/7 \times 0,45^2) \times 894,25 \\
 &= 142,28 \text{ ton}
 \end{aligned}$$

$$\begin{aligned}
 P_{\text{Single Allowance}} &= \frac{Q_p}{SF} \\
 &= \frac{142,28}{3}
 \end{aligned}$$

$$= 47,43 \text{ ton}$$

$$\begin{aligned} P_{\text{Group Allowance}} &= P_{\text{Single Allowance}} \times E_g \\ &= 47,43 \times 0,88 \\ &= 41,81 \text{ ton} \end{aligned}$$

End Bearing Control:

$$\begin{array}{ccc} P_{\text{max}} & \leq & P_{\text{Group Allowance}} \\ 34,65 & \leq & 41,81 \quad \text{OK} \end{array}$$

Floating Foundation Design

The material that used as filler of floating foundation is a floaton material that shaped square (50 cm x 50 cm x 40 cm), floaton material was one of light material. Floaton form of polymer material (100% High Density Polyethylene), with 24 Kg/m³ max wight. The principle of floating foundation is to flatten and equalize the bridge load to the soil base, so that it will cause zero settlement of the structure.

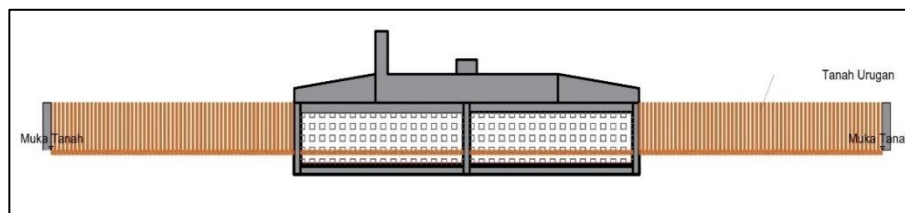


Figure 10. Alternative design of Floating Foundation on Bridge Abutment

The following is the foundation plan used:

Floating Foundation Specification:

$$\begin{aligned} \text{Floaton Weight floating (W)} &= 6 \text{ kg} \\ \text{Floaton Width (B)} &= 0,5 \text{ m} \\ \text{Floaton Length (L)} &= 0,5 \text{ m} \\ \text{Floaton Height (H)} &= 0,4 \text{ m} \\ \text{Floaton Volume (V)} &= L \times B \times H \\ &= 0,5 \times 0,5 \times 0,4 \\ &= 0,10 \text{ m}^3 \end{aligned}$$

$$\begin{aligned} \text{Volume Weigth } (\gamma) &= \frac{W}{V} \\ &= \frac{6}{0,10} \end{aligned}$$

$$\begin{aligned} \text{Concrete Density } (\gamma) &= 2400 \text{ kg/m}^3 = 2,4 \text{ ton/m}^3 \end{aligned}$$

$$\text{Dead Load,} = 444,44 \text{ kN}$$

$$\text{Live Load,} = 771,58 \text{ kN}$$

$$\begin{aligned} \text{Total} &= 444,44 + 771,58 \\ &= 1216,01 \text{ kN} \end{aligned}$$

$$= 124,03 \text{ ton}$$

$$\text{Floaton Weight} = 3,168 \text{ ton}$$

$$\text{Vertical Restaint Weight Y-axis} = 10,098 \text{ ton}$$

$$\text{Lateral Restraint Weight} = 25,344 \text{ ton}$$

Lateral Restaint Weight X-axis = 10,8864 ton
Floating Foundation Total Weight = 49,50 ton

Floating Foundation Bearing Capacity

Because the subgrade has very soft soil, the soil conditions are planned as follows:

Undrained Shear Strength, C_u = (take between 0,74 – 1,25 ton/m²)

C_u = 1 ton/m²

ϕ = 0°

Because $\phi = 0$, maka $N_c = 5,7$; $N_q = 1$; $N_\gamma = 0$; $\gamma = 1,7$ t/m³

Table 7. Bearing Capacity Terzaghi Value

ϕ	General Shear Collapse		
	N_c	N_q	N_γ
0	5,7	1	0
5	7,3	1,6	0,5
10	9,6	2,7	1,2
15	12,9	4,4	2,5
20	17,7	7,4	5
25	25,1	12,7	9,7
30	37,2	22,5	19,7
34	52,6	36,5	35
35	57,8	41,4	42,4
40	95,7	81,3	100,4
45	172,3	173,3	297,5
48	258,3	287,9	780,1
50	347,6	415,1	1153,2

The bearing capacity of the soil is calculated using the Terzaghi formula for foundation size B x L. Depth is taken, Df = 1.5 meters because the foundation goes into the ground and the fill soil is 1.5 m deep, so:

$$q_{ult} = 1.3 \cdot C_u \cdot N_c + \gamma \cdot D_f \cdot N_q + \{f(B, L) \times B \times \gamma \times N_\gamma \quad \dots(12)$$

$$q_{Safe} = \frac{1.3 \times C_u \times N_c}{SF} + \gamma \times DF$$

$$q_{Safe} = \frac{(1.3 \times 1.0 \times 5.7)}{3} + 1,7 \times 1,5$$

$$q_{Safe} = 5,02 \text{ ton/m}^2$$

Floating Foundation Control

Base area requires for Floating Foundation:

$$A_{need} = \frac{(\text{Total planning load} + P \text{ total Floating})}{q_{safe}} \quad \dots(13)$$

$$= \frac{(124,03 + 49,5)}{5,02}$$

$$= 34,57 \text{ m}^2$$

$$A_{available} = B \times L$$

$$= 3,2 \times 11$$

$$= 35,2 \text{ m}^2$$

$$\begin{array}{rcl} A_{\text{need}} & \leq & A_{\text{available}} \\ 34,57 & \leq & 35,2 \quad \text{difference } 1,78\% \text{ (OK)} \end{array}$$

Based on the planning results above, it can be determine into the form of a planning drawing with the following design:

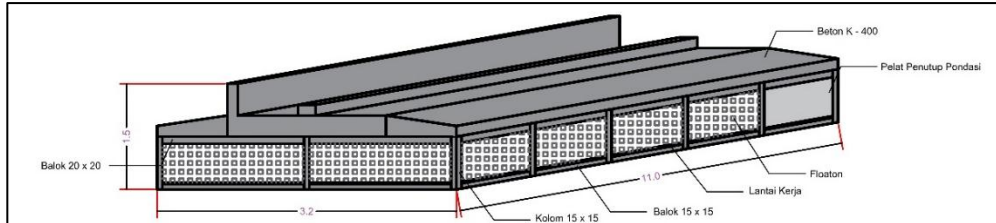


Figure 11. Perspective view of Floating Foundation on Abutment

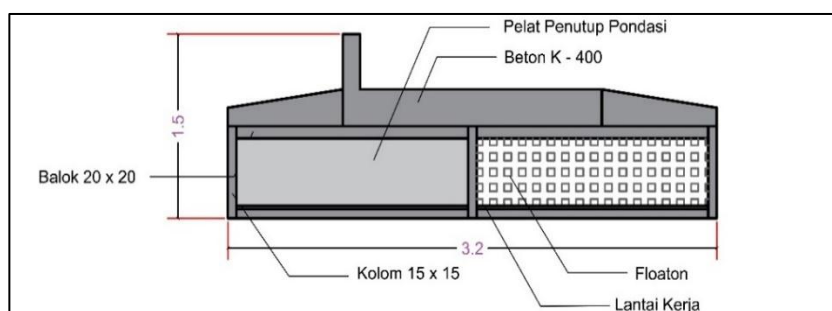


Figure 12. Long view of Floating Foundation on Abutment

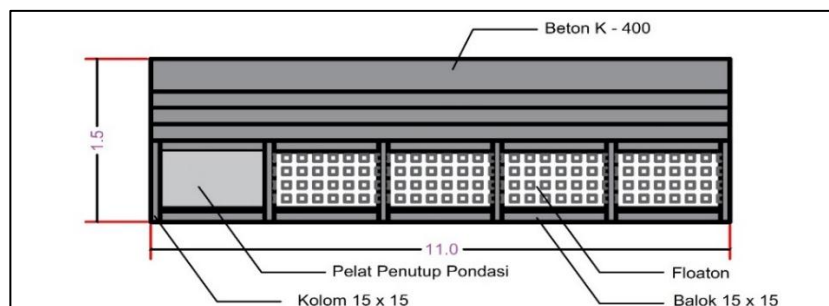


Figure 13. Cross View of Floating Foundation on Abutment

CONCLUSION

Based on the results of discussions that have been carried out on the Muara Tahai Bridge project with a total span of 50 meters and a bridge width of 10.6 meters. Then it can be concluded as follows:

1. The existing design of pile foundation using bearing capacity requires a length of 28 meters with dimensions of 50 cm with a total of 8 piles. Control results shows $P_{\text{max}} 39.12 \text{ Tons} < P_{\text{group allowance}} 55,3 \text{ Tons}$ (OK)
2. The existing design of pile foundation using bearing capacity requires a length of 20 meters with dimensions of 50 cm with a total of 8 piles. Control results shows $P_{\text{max}} 34,65 \text{ Tons} < P_{\text{group allowance}} 41,81 \text{ Tons}$ (OK)
3. The alternative design of the foundation structure under the bridge using Floaton. The required foundation dimensions are 11 meters long, 3.2 meters wide and 1.5 meters thick. The bearing capacity of the foundation based on the terzaghi theory is 5.02 T/m².

REFERENCES

- [1] Bulley, W.A., (1965). *Cylindrical Pile Retaining Wall Construction-Seattle Freeway, Paper presented at Roads and Streets Conference*. Seattle. Washington.
- [2] Das, Braja M. (1990). *Principles of Foundation Engineering*. Boston: PWS-KENT.
- [3] DeBeer, E. E., dan Wallays, M., (1970). Stabilization of a slope in schist by means of bored piles reinforced with steel beams. *Proceeding 2nd International Congress Rock Mechanics*, Vol. 3, 361-369.
- [4] Dirjen Bina Marga (1992). Direktorat Jenderal Bina Marga, Departemen Pekerjaan Umum, *Bridge Management System*. Jakarta.
- [5] Dirjen Prasarana Wilayah (2002). *Desain Geometrik Jalan – Strategic Roads Rehabilitation Project (SRRP), Konsep Perencanaan Jalan*, Direktorat Jenderal Prasarana Wilayah, Departemen Permukiman dan Prasarana wilayah, Jakarta.
- [6] Iswan, dkk., (2016). Eksperimen dan Analisis Perilaku Tanah Lempung Lunak dan Lempung Organik Ditinjau dari Siklus Pembebanan yang Menggunakan Matras Beton Bambu, *Prosiding Seminar Nasional Sains Matematika Informatika dan Aplikasinya IV*, ISSN: 2086 – 2342 Vol. 4 Buku 3.
- [7] Ito, T., Matsui, T., dan Hong, W. P., (1981). *Design method for stabilizing piles against landslide - one row of piles*, *Soils and Foundations*, Vol.21, No.1, pp.21-37.
- [8] Direktorat Bina Teknik (2010), *Perencanaan Teknik Jembatan*, Direktorat Jenderal Bina Marga, Departemen Pekerjaan Umum, Jakarta.
- [9] Dit BinteK (2008). *Prinsip Dasar Teknik Jembatan dan Alikasinya*. Direktorat Bina Teknik, Direktorat Jenderal Bina Marga, Departemen Pekerjaan Umum, Jakarta.
- [10] Dirjen Binamarga (1997). *Geometrik Untuk Jalan Perkotaan, Standar Perencanaan*. Direktorat Jenderal Bina Marga, Jakarta.
- [11] Ditjen Bina Marga(1997). Geometrik Jalan Antar Kota No. 038/T/BM/1997, Tata Cara Perencanaan Direktorat Jenderal Bina Marga, Jakarta.
- [12] Mochtar, I. B., (2000). *Teknologi Perbaikan Tanah dan Alternatif Perencanaan pada Tanah Bermasalah (Problematic Soils)*. Penerbit Jurusan Teknik Sipil FTSP-ITS, Surabaya.
- [13] Mochtar, NE. (2012). *Modul Ajar Metode Perbaikan Tanah*. Jurusan Teknik Sipil FTSP-ITS. Surabaya.
- [14] NAVFAC DM-7 (1971). *Design Manual, Soil Mechanics, Foundation and Earth Structures, Depth. Of the Naval Facilities Engineering Command*, Virginia, USA.
- [15] Offenberger, J.H, (1981), *Hillside stabilized with concrete cylinder pile retaining wall*, *Public Works*, Vol. 112, No. 9, pp. 82-86.
- [16] Pebriansyah, (2017). *Makalah Metode Perbaikan Tanah “Geotextile”*. Tarakan: Universitas Borneo.
- [17] Pedoman Kimpraswil (2002). *Panduan Geoteknik 1 (Proses Pembentukan dan Sifat-Sifat Dasar Tanah Lunak)*. Departemen Permukiman dan Prasarana Wilayah, Jakarta.
- [18] Pedoman Konstruksi dan Bangunan (2009), *Perencanaan dan Pelaksanaan Perkuatan Tanah dengan Geoteknik*. Departemen Pekerjaan Umum, Jakarta.
- [19] Puslitbang Jalan dan Jembatan (2005). *RSNI-T-2-2005, Pembebanan Untuk Jembatan* Departemen Pekerjaan Umum, Jakarta.
- [20] Terzaghi, K. (1925). *Principles of Soil Mechanics*. *Engr. News Record*, Vol. 95, pp. 832-

836.